

Addition of a new **ID Cut** function
that helps to achieve labor-saving process & business efficiency!

CUTTING PLOTTER

FXII Plus series

CG-75FXII Plus CUTTING PLOTTER CG-130FXII Plus CUTTING PLOTTER CG-160FXII Plus CUTTING PLOTTER

New world standard of multi cutting plotter



CG-130FXII Plus

ID Cut improves your work efficiency!

In collaboration with JV300-130/160 Plus, continuous cutting operations can be performed automatically for small-quantity and multi-product orders of stickers and labels.



JV300-130/160 Plus



CG-FXII Plus Series

Scanning of register marks with ID that are printed out by JV300-130/160 Plus enables unmanned and continuous cutting operations to be performed automatically by means of CG-FXII Plus Series !



Available for creation of stickers
and vehicle wrapping films!



Plug-in cutting
software compatible

With Adobe
Illustrator/CorelDRAW

Fine Cut/Coat 9

Original function Advantages of ID Cut



It makes multiple types of small lot cutting possible by unmanned operation.

When cutting several pieces of data, any operators had to confirm completion of the cutting operation and specify any cut data for each. Because use of the ID Cut function automatically performs continuous read-out operations of register marks with ID, including the cutting information, the entire operation can be completed in a single specification of data. When the machine is performing the cutting operation, operators can proceed with other jobs simultaneously.

Preventing incorrect operations during post processes to save wasting media and labor

Using the ID Cut eliminates manual setting mistakes of media. In addition, any extra print-out operations in the past are now rendered unnecessary, which were performed intentionally just in case of cutting failure, so media and working time for that purpose can also be saved to increase work efficiency.

The "ID Cut function" is the function that automatically scans register marks with ID which is printed out by the optionally available JV300-130/160 Plus, then reads and cuts cut data. When the register mark sensor reads ID, it asks the applicable PC to send cutting data information to it, and starts the cutting operation automatically. Since ID is printed out in four directions, a correct cutting operation will be performed because the machine recognizes an orientation of any media, regardless of orientation of such media.

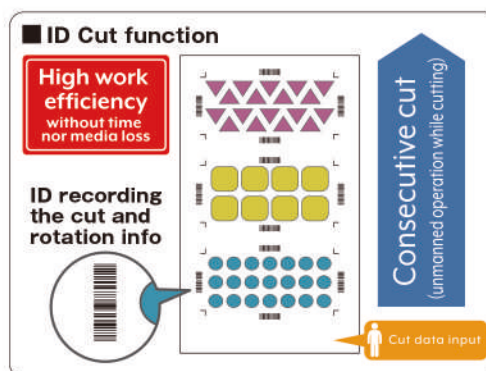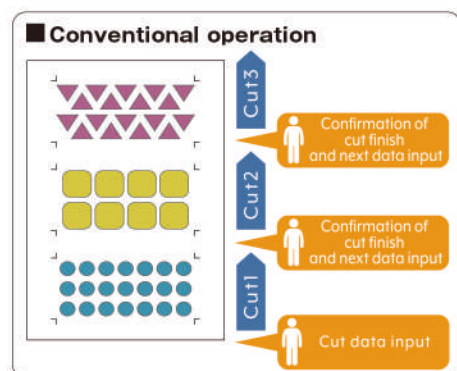

Print data as well as register mark with ID can be printed out by JV300-130/160 Plus simultaneously.



Specifications

Item		CG-75FXII Plus	CG-130FXII Plus	CG-160FXII Plus
Acceptable sheet size	width	90 - 1,040 mm (3.54 - 40.9")	90 - 1,580 mm (3.54 - 62.0")	90 - 1,880 mm (3.54 - 74.0")
	Roll weight	18 kg (39.7 lb) or less		
	Roll dia	200mm (7.87") or less		
Effective cutting area*1		760 mm × 51 m (29.9" × 167')	1,300 mm × 51 m (51.2" × 167')	1,600 mm × 51 m (63.0" × 167')
Max. auto cutting area*2		870 mm (34.3")	1,425 mm (56.1")	1,720 mm (67.7")
Max. speed		140cm/s (In a 45° direction and in a pen-up state)		
Adjustable speed range (cutting/plotting)*3		1 - 10 cm/s (1 cm/s step), 10 - 50 cm/s (5 cm/s step), 50 - 100 cm/s (10 cm/s step)		
Mechanical resolution		5 μm (0.0002")		
Command resolution		25 μm, 10 μm (MGL-IIC), 100 μm, 50 μm (MGL-Ic1)		
Repeatability		±0.2mm (0.0079")		
Accuracy assurance range		Excluding shrinkage/expansion caused by the film temperature		
		760 mm × 10 m (29.9" × 0.39")	1,300 mm × 10 m (51.2" × 0.39")	1,600 mm × 10 m (63.0" × 0.39")
Max. pressure		Depending on the specified film and cutting conditions		
Pressure setting	Cutter	10 - 20 g (2 g step), 20 - 100 g (5 g step), 100 - 500 g (10 g step)		
	Pin	10 - 20 g (2 g step), 20 - 100 g (5 g step), 100 - 500 g (10 g step)		
	Pen	10 - 20 g (2 g step), 20 - 100 g (5 g step), 100 - 150 g (10 g step)		
Acceptable cutting sheet*4		Vinyl up to 0.25mm (0.01") thickness, Fluorescent sheet, Reflective sheet		
Acceptable sheet for pouncing*5		Paper thickness 0.06 - 0.13 mm (0.0024" - 0.005")		
Applicable tools*6		Cutter, Water based ball-point pen, Oil based ball-point		
Certifications		VCCI class A, FCC class A, IEC 62368-1 ETL, CE Marking (EMC, Low voltage and Machinery directive) CB, RoHS, REACH, Energy star, RCM		
Type of command		MGL-IIC/Ic1		
Interface		RS-232C/USB		
Receiver buffer size		30Mb standard (20Mb when in sorting)		
Operation environment		Temperature : 5 - 35 degrees Humidity : 35 - 75% (Rh) Non-condensation AC100V - 240V 1A 50/60Hz		
Power		AC100V - 240V 1A 50/60Hz		
Power consumption		100W or less		
Dimensions (W x D x H)		1,285 × 700 × 1,217 mm (50.5 × 27.5 × 47.9")	1,825 × 700 × 1,217 mm (71.8 × 27.5 × 47.9")	2,125 × 700 × 1,217 mm (83.6 × 27.5 × 47.9")
Weight		47 kg (104 lb)	62 kg (137 lb)	70 kg (154 lb)

*1: Maximum sheet feeding length differs depending on the software.

*2: Sheet width to cut off from the roll.

*3: Restricted sheet width.

*4: Provided that the blade specific to fluorescent type vinyl (SPB-0007) and the blade specific to reflective sheet (SPB-0006) are used.

*5: Pouncing tool intended specifically for pouncing shall be used.

*6: The goods on the market are φ8~φ9 mm pen. Accuracy and image quality are not guaranteed

Some of sample images in this catalog are artificial renderings. Specifications, design and dimensions stated in this catalog may be subject to change without notice for technical improvements etc. The corporate names and merchandise names written in this catalog are the trademark or registered trademark of the respective corporations. Please note that descriptions and data in this catalog are as of as of July 2022.

Mimaki
mimaki.com

MIMAKI ENGINEERING CO., LTD.
2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan
TEL: +81-268-64-2281

Mimaki Global Network

USA MIMAKI USA, INC.
Brazil MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA
India MIMAKI INDIA PRIVATE LIMITED
Taiwan MIMAKI ENGINEERING (TAIWAN) CO.,LTD.
Singapore MIMAKI SINGAPORE PTE. LTD.

Europe MIMAKI EUROPE B.V.
Indonesia PT. MIMAKI INDONESIA
Australia MIMAKI AUSTRALIA PTY. LTD.
China SHANGHAI MIMAKI TRADING CO.,LTD.
Thailand MIMAKI (THAILAND) CO.,LTD.



Authorised Dealer
APSON TECHNOLOGIES (INDIA) PVT. LTD.
Unit 202, Shri Sai Corporate Park Premises CSL
Plot No B/8, Mahakali Mandir Road, off Link Road,
Opp. Laxmi Nagar Ind. Estate, Goregaon (West), Mumbai - 400 104
Email:- marketing@apsontechnologies.com
Tel.: 022-2088 7809 / 37, Mob.: +91-8879543580

DELHI NCR: Mob: +91-9810343951 | SOUTH: +91-8291701781
KOLKATA: +91-9830364995, +91-9331269836 | GUJARAT: +91-8879543580
PUNE: +91-9321895804 | ODISHA & CHHATTISGARH: +91-9692564656